



QU3V-XX

SPECIFICATION

- 1/2" THERMOSTATIC VALVE.
- VERTICAL 3 FUNCTIONS NISSIMA SHOWER VALVE
- SHUT-OFF VALVE WITH VOLUME CONTROL.
- ASSEMBLED WITH STAINLESS STEEL BRAIDED HOSES.
- 1/2" HI-FLOW INLET HOSES.

AVAILABLE OPTION

N/A

FINISH AVAILABLE

- STAINLESS STEEL : CHROME
- TEMPERED GLASS : LAMINATED VINYL BACKING FINISHES
REFER TO WEBSITE FOR CHOICE OF COLORS.

CONNECTION

- 1/2" FEMALE NPT

FLOW RATE

- THERMOSTATIC VALVE : 30 L/MIN [7.9 GPM] @ 60 PSI


WARRANTY

PRODUCTS COVERED BY A FULL LIMITED LIFETIME WARRANTY AGAINST ALL MANUFACTURING DEFECTS.


FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.



Intertek ASME 112.118.1 / CSA B125.1

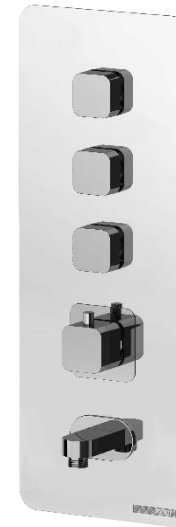

DIMENSIONS (SLIK COLLECTION SHOWN)

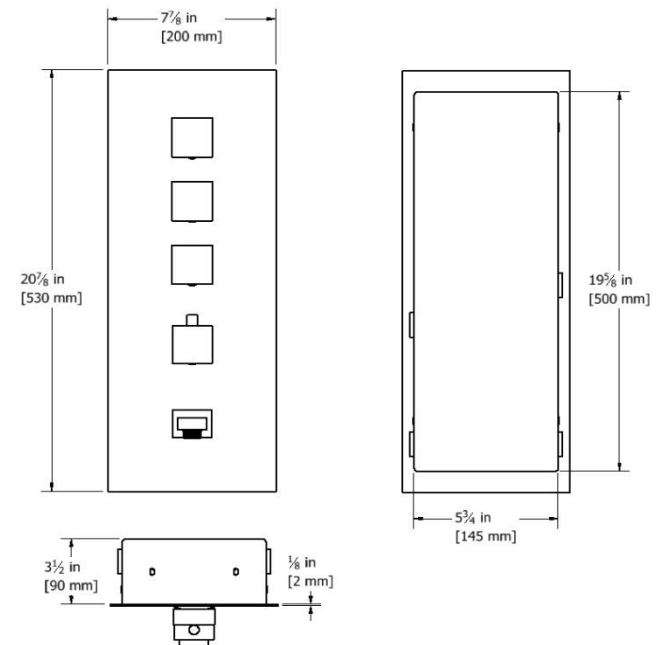

THE ROUGH BOX DIMENSIONS MAY VARY FROM ± 5 MM

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE

REV.:02/2018