



RU65-HC-XX / RU65-HK-XX

SPECIFICATION

- 1/2" THERMOSTATIC VALVE.
- HORIZONTAL 2 FUNCTIONS NISSIMA SHOWER VALVE.
- CERAMIC DIVERTER CARTRIDGE.
- ASSEMBLED WITH STAINLESS STEEL BRAIDED HOSES.
- 1/2" HI-FLOW INLET HOSES.
- OPTION OF CHANGING THE HAND SHOWER ELBOW BY AN HOLDER.

AVAILABLE OPTION

VALVE CODE	ELBOW TYPE	# HOLDER OR ELBOW
RU65-HC-XX*	HOLDER (HK)	HK-303
RU65-HK-XX	ELBOW (HC)	HC-303

* ILLUSTRATED MODEL

FINISH AVAILABLE

- STAINLESS STEEL : CHROME
- TEMPERED GLASS : LAMINATED VINYL BACKING FINISHES
REFER TO WEBSITE FOR CHOICE OF COLORS.

CONNECTION

- 1/2" FEMALE NPT

FLOW RATE

- THERMOSTATIC VALVE : 30 L/MIN [7.9 GPM] @ 60 PSI
- SPOUT: 25 L/MIN [6.6 GPM] @ 60 PSI


WARRANTY

PRODUCTS COVERED BY A FULL LIMITED LIFETIME WARRANTY AGAINST ALL MANUFACTURING DEFECTS.


FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.



Intertek ASME 112.118.1 / CSA B125.1

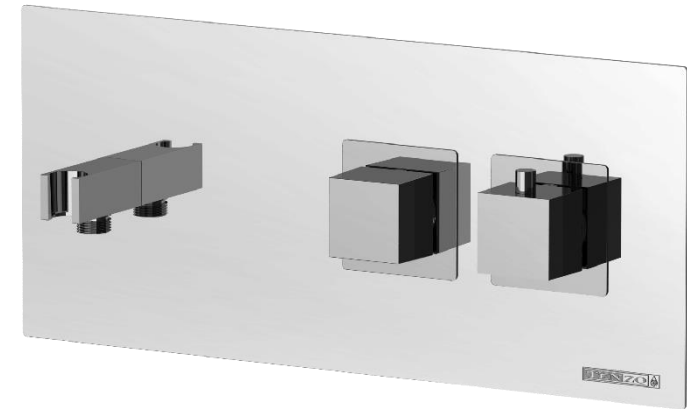

DIMENSIONS (SLIK COLLECTION SHOWN)

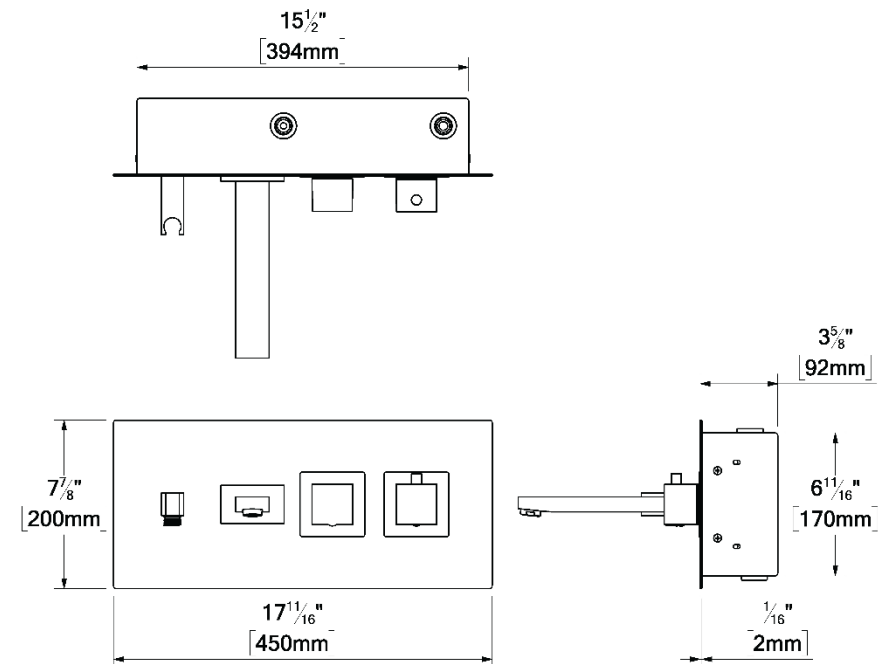

THE ROUGH BOX DIMENSIONS MAY VARY FROM ± 5MM

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE

REV.:02/2018